COMPLETE HEARING SOLUTIONS LLC



Window Intercom Systems

Enhance your customer service by aiding and improving your communication with customers

Contents

Complete Kits

Page

STS-K070 Dual Speaker Pod System 4
STS-K071 Speaker and Microphone Pod System 5
STS-K072 Screen Mounted Microphone System 6
STS-K073 Dual Loudspeaker Pod System 7
STS-K001 Bridge Bar System 8
STS-K002 Surface Mounted System 9
STS-K003 Flush Mounted System 10
STS-K009-IP-L-B Surface Mounted Call System..... 11
STS-K020 Retrofit Glass Mounted System 12
STS-K021 Window Mounted System (Non Ballistic Rated) 13
STS-K022 Window Mounted System (Level 3 Ballistic Rated) 14
STS-K023 Window Mounted System (Level 8 Ballistic Rated) 15
STS-K035 Curved Microphone System 16
STS-K058 Bent Microphone System 17
STS-K060 Stainless Bridge Bar System 18
STS-K064 Overhead Speaker & Anti-Vandal Microphone System 19
STS-K080-IP, IP54 Speaker and Microphone System 20
STS-SS Integrated System 21

Accessories

Hearing Loop Aerials

IL-AE98 Window Mounted Loop Aerial..... 22
IL-AE99 Under the Counter Hearing Loop Aerial..... 22

Wired and Wireless Headset Options

STS-SJB Break Out Box..... 23
HEADSET-1-RJ11/HEADSET-1-3.5MM Wired Headset 24
HEADSET-2-RJ11/HEADSET-2-3.5MM Wired Headset 24
HEADSET-1-DECT Wireless Headset 25
HEADSET-2-DECT Wireless Headset 25

.



STS-K070

Dual Speaker Pod System

The STS-K070 Window Intercom System is an entry level kit that provides high quality sound across partitions and safety screens, featuring a speaker pod and mouse microphone for both the staff and customer sides. It's an affordable system suitable for environments with low ambient noise.

Kit Includes

- STS-A31H Window Intercom Amplifier
- STS-M70 Mouse Microphone x2
- STS-S70 Speaker Pod x2
- PS-55 Power Supply

Optional Accessories

- IL-AE99 Under the Counter Hearing Loop Aerial

Applications

For use where one to one communication is impaired by glass, such as:

- Nursing or Retirement Homes
- Hospitals
- Reception Counters
- Banks
- Retail Stores

Physical Data

Dimensions (boxed)	Height – 12.20" Width – 12.20" Depth – 6.20"
Weight	2.6lbs
Construction	ABS Plastic
Finish	Black RAL 9005

Ambient Noise Suitability

Low



STS-K071

Speaker and Microphone Unit Pod System

The STS-K071 Window Intercom System is an entry level kit that provides high quality sound across partitions and safety screens, featuring a customer speaker pod and mouse microphone. For the staff side, a combined speaker and microphone staff unit is included making the system suitable for environments with moderate ambient noise.

Includes

- STS-A31H Window Intercom Amplifier
- STS-M70 Mouse Microphone
- STS-S70 Speaker Pod
- STS-SU2 Staff Unit
- PS-55 Power Supply

Optional Accessories

- IL-AE99 Under the Counter Hearing Loop Aerial

Applications

For use where one to one communication is impaired by glass, such as:

- Nursing or Retirement Homes
- Hospitals
- Reception Counters
- Banks
- Retail Stores

Physical Data

Dimensions (boxed)	Height – 12.20″ Width – 12.20″ Depth – 6.20″
Weight	3.0lbs
Construction	ABS Plastic
Finish	Black RAL 9005

Ambient Noise Suitability

Moderate



STS-K072

Screen Mounted Microphone System

The STS-K072 Window Intercom System is entry level kit that provides high quality sound across partitions and safety screens. The kit features a customer speaker pod and screen mounted microphone and a combined speaker and microphone staff unit. It is an affordable system suitable for environments with high ambient noise.

Includes

- STS-A31H Window Intercom Amplifier
- STS-M14-BENT Microphone
- STS-S70 Speaker Pod
- STS-SU2 Staff Unit
- PS-55 Power Supply

Optional Accessories

- IL-AE99 Under the Counter Hearing Loop Aerial

Applications

For use where one to one communication is impaired by glass, such as:

- Nursing or Retirement Homes
- Hospitals
- Reception Counters
- Banks
- Retail Stores

Physical Data

Dimensions (boxed)	Height – 12.20″ Width – 12.20″ Depth – 6.20″
Weight	3.4lbs
Construction	ABS Plastic
Finish	Black RAL 9005

Ambient Noise Suitability

High



STS-K073

Dual Loudspeaker Pod System

The STS-K073 Window Intercom System is an entry level kit that provides high quality sound across partitions and safety glass. The kit features two STS-SU2 combined speaker and microphone units, one for the staff and one for customer. The STS-SU2's can be free standing or surface mounted.

Includes

- STS-A31H Window Intercom Amplifier
- STS-SU2 Staff Unit x2
- PS-55 Power Supply

Optional Accessories

- IL-AE99 Under the Counter Hearing Loop Aerial

Applications

For use where one to one communication is impaired by glass, such as:

- Nursing or Retirement Homes
- Hospitals
- Reception Counters
- Banks
- Retail Stores

Physical Data

Dimensions (boxed)	Height – 12.20" Width – 12.20" Depth – 6.20"
Construction	ABS Plastic
Finish	Black RAL 9005

Ambient Noise Suitability

High



STS-K001

Bridge Bar System

The STS-K001 Window Intercom System features the STS-B80 Bridge Bar Customer Unit with a central microphone and speakers on either side. For the staff, the STS-SU1-3W combined microphone and speaker unit has an adjustable neck and features a three way mute switch. The kit comes with an IL-AE99 under the counter hearing loop aerial.

Includes

- STS-A31H Window Intercom Amplifier
- STS-B80 Bridge Bar Customer Unit
- STS-SU1-3W Staff Unit
- PS-55 Power Supply
- IL-AE99 Under the Counter Hearing Loop Aerial

Applications

For use where one to one communication is impaired by glass, such as:

- Banks
- Post Offices
- Theaters
- Information Centers
- Public Transit Systems
- Ticket Counters
- Embassies
- Government Buildings

Physical Data

Dimensions (boxed)	Height – 4.63″ Width – 25.50″ Depth – 13.06″
Weight (boxed)	8.0lbs
Construction	Mild Steel
	ABS Plastic
Finish	Grey Leatherette
	Black Textured

Product Codes

Bridge Bar Kit in Grey	STS-K001-G
Bridge Bar Kit in Black	STS-K001-B

Ambient Noise Suitability

High



STS-K002

Surface Mounted System

The STS-K002 Window Intercom System features customer side surface mount speaker and microphone units. For the staff, the STS-SU1-3W combined microphone and speaker unit has an adjustable neck and features a three way mute switch. The kit comes with an IL-AE99 under the counter hearing loop aerial.

Includes

- STS-A31H Window Intercom Amplifier
- STS-S60 Surface Mounted Speaker
- STS-M54 Surface Mounted Microphone
- STS-SU1-3W Staff Unit
- PS-55 Power Supply
- IL-AE99 Under the Counter Hearing Loop Aerial

Applications

For use where one to one communication is impaired by glass, such as:

- Banks
- Post Offices
- Theaters
- Information Centers
- Ticket Counters
- Embassies
- Government Buildings

Physical Data

Dimensions (boxed)	Height –5.12″ Width – 13.39″ Depth – 9.45″
Weight (boxed)	5.42lbs
Construction	Mild Steel
	ABS Plastic
Finish	Grey Leatherette
	Black Textured

Product Codes

Surface Mounted Kit in Grey	STS-K002-G
Surface Mounted Kit in Black	STS-K002-B

Ambient Noise Suitability

Moderate



STS-K003

Flush Mounted System

The STS-K003 Window Intercom System features customer flush mount speaker and microphone units that can be installed into the counter or nearby vertical surface. They prevent tampering in high-risk environments such as banks and prisons. For the staff, the STS-SU1-3W combined microphone and speaker unit has an adjustable neck and features a three way mute switch. The kit comes with an IL-AE99 under the counter hearing loop aerial.

Includes

- STS-A31H Window Intercom Amplifier
- STS-S61 Flush Mounted Speaker
- STS-M56 Flush Mounted Microphone
- STS-SU1-3W Staff Unit
- PS-55 Power Supply
- IL-AE99 Under the Counter Hearing Loop Aerial

Applications

For use where one to one communication is impaired by glass, such as:

- Banks
- Post Offices
- Correctional Facilities
- Ticket Counters
- Embassies
- Government Buildings

Physical Data

Dimensions (boxed)	Height –5.12" Width – 13.39" Depth – 9.45"
Weight (boxed)	5.29lbs
Construction	Mild Steel
	ABS Plastic
Finish	Grey Leatherette
	Black Textured

Product Codes

Flush Mounted Kit in Grey	STS-K003-G
Flush Mounted Kit in Black	STS-K003-B

Ambient Noise Suitability

Moderate



STS-K009-IP-L-B

IP55 Surface Mounted Call System

The STS-K009-IP-L-B Window Intercom System features a customer IP55 weather rated outdoor Call Unit. It is ideal for locations such as parking lots, gated entrances and doorways, delivery points and other open-air applications. The IP55 rating ensures protection against water, dust, and dirt ingress. For the staff, the STS-SU1-3W combined microphone and speaker unit has an adjustable neck and features a three way mute switch. The kit comes with an IL-AE99 under the counter hearing loop aerial.

Includes

- STS-A31H Window Intercom Amplifier
- K009-IP Surface Mounted Call Unit
- STS-SU1-3W Staff Unit
- PS-55 Power Supply
- IL-AE99 Under the Counter Hearing Loop Aerial

Applications

For use outdoors in venues such as:

- Outdoor access points
- Transport and distribution stations
- Ports and ferry terminals
- Parking Garages
- Medical facilities
- Drive through services (food, banking, retail)

Physical Data

Dimensions (boxed)	Height – 4.00″ Width – 12.88″ Depth – 9.63″
Weight	7.4lbs
Construction	Mixed
Finish	Black Powder Coated Leatherette

Ambient Noise Suitability

Moderate



STS-K020-S23

Window Mounted System

The STS-K020 Window Intercom System is specifically designed to retrofit into a glass window where an existing system has left a hole in the glass. The glass mounted customer microphone is attached with two polcarbonate plates. The kit comes with the STS-S23 overhead customer speaker, STS-SU1-3W combined microphone and speaker unit for the staff and a glass mounted hearing loop aerial and sign.

Includes

- STS-A31H Window Intercom Amplifier
- STS-S23 Surface Mounted Overhead Speaker
- STS-C100 Glass Mounted Microphone Kit
- STS-SU1-3W Staff Unit
- PS-55 Power Supply
- IL-AE98 Window Mounted Hearing Loop Aerial

Applications

For use where one to one communication is impaired by glass, such as:

- Banks
- Public Transit Systems
- Police Departments
- Ticket Counters
- Embassies
- Government Buildings

Ambient Noise Suitability

High

Physical Data

Dimensions (boxed)	Height –5.00″ Width – 13.50″ Depth – 9.50″
Weight (boxed)	6.4lbs
Construction	Mild Steel
	ABS Plastic
Finish	Grey Leatherette
	Grey Semi Gloss
	Black Textured

Product Codes

Retrofit Kit to accomodate 4″ hole	STS-K020-S23
Retrofit Kit to accomodate 5″ hole	STS-K020-S23-6



STS-K021

Window Mounted System (Non Ballistic Rated)

The STS-K021 Window Intercom System provides clear communication for applications where there is a hole in the glass. This robust system overcomes communication barriers caused by glass, security screens or similar partitions. The kit features a STS-BL0, a non ballistic rated glass mounted, all-in-one speaker and microphone customer unit. It allows for simple installation and ensures both the customer and staff can be clearly heard.

Includes

- STS-A31H Window Intercom Amplifier
- STS-SU1-3W-SIL-400 Staff Unit
- STS-BL0 Customer side speaker and microphone
- PS-55 Power Supply
- IL-AE98 Window Mounted Hearing Loop Aerial

Applications

For use outdoors in venues such as:

- Banks
- Public Transit Systems
- Embassies
- Government Buildings
- Theatres
- Information Centers

Physical Data

Dimensions (boxed)	Height – 5.90″ Width – 20.40″ Depth – 12.50″
Construction	Mixed
Finish	Powder Coated Silver Sparkle

Ambient Noise Suitability

Moderate



STS-K022

Window Mounted System (Level 3 Ballistic Rated)

The STS-K022 Window Intercom System provides clear communication in secure environments. Designed for applications where there is a hole in the glass, this robust system overcomes communication barriers caused by glass, security screens or similar partitions. The kit features a Level 3 Ballistic rated STS-BL3, a glass mounted, all-in-one speaker and microphone customer unit. It ensures protection and seemless interactions in high security environments.

Includes

- STS-A31H Window Intercom Amplifier
- STS-SU1-3W-SIL-400 Staff Unit
- STS-BL3 Customer side speaker and microphone
- PS-55 Power Supply
- IL-AE98 Window Mounted Hearing Loop Aerial

Applications

For use outdoors in venues such as:

- Banks
- Public Transit Systems
- Embassies
- Government Buildings
- Theatres
- Information Centers

Physical Data

Dimensions (boxed)	Height – 5.90″ Width – 20.40″ Depth – 12.50″
Construction	Mixed
Finish	Powder Coated Silver Sparkle

Standards

- Level 3 UL 752 Ballistic Rated

Ambient Noise Suitability

Moderate



STS-K023

Window Mounted System (Level 8 Ballistic Rated)

The STS-K023 Window Intercom System provides clear communication in secure environments. Designed for applications where there is a hole in the glass, this robust system overcomes communication barriers caused by glass, security screens or similar partitions. The kit features a Level 8 Ballistic rated STS-BL8, a glass mounted, all-in-one speaker and microphone customer unit. It ensures protection and seemless interactions in high security environments.

Includes

- STS-A31H Window Intercom Amplifier
- STS-SU1-3W-SIL-400 Staff Unit
- STS-BL8 Customer side speaker and microphone
- PS-55 Power Supply
- IL-AE98 Window Mounted Hearing Loop Aerial

Applications

For use outdoors in venues such as:

- Banks
- Public Transit Systems
- Embassies
- Government Buildings
- Theatres
- Information Centers

Physical Data

Dimensions (boxed)	Height – 5.90″ Width – 20.40″ Depth – 12.50″
Construction	Mixed
Finish	Powder Coated Silver Sparkle

Standards

- Level 8 UL 752 Ballistic Rated

Ambient Noise Suitability

Moderate



STS-K035

Curved Microphone System

The STS-K035 Window Intercom System features a Half Bridge Bar customer speaker and microphone unit that can be positioned to the left or right of a pass through tray. For the staff, the STS-SU1-3W combined microphone and speaker unit has an adjustable neck and features a three way mute switch. The kit comes with an IL-AE99 under the counter hearing loop aerial.

Includes

- STS-A31H Window Intercom Amplifier
- STS-B94 (LH/RH) Half Bridge Bar Unit
- STS-SU1-3W Staff Unit
- PS-55 Power Supply
- IL-AE99 Under the Counter Hearing Loop Aerial

Applications

For use where one to one communication is impaired by glass, such as:

- Banks
- Post Offices
- Theaters
- Information Centers
- Ticket Counters
- Embassies
- Government Buildings

Physical Data

Dimensions (boxed)	Height –6.30″ Width – 12.20″ Depth – 11.81″
Weight (boxed)	5.78lbs
Construction	Mild Steel
	ABS Plastic
Finish	Grey Leatherette
	Black Textured

Product Codes

Curved Left Microphone Kit in Black	STS-K035-LH-B
Curved Left Microphone Kit in Grey	STS-K035-LH-G
Curved Right Microphone Kit in Black	STS-K035-RH-B
Curved Right Microphone Kit in Grey	STS-K035-RH-G



STS-K058

Bent Microphone System

The STS-K058 Window Intercom System kit includes the customer STS-S60 Surface Mounted Speaker unit and the STS-M14-BENT Window Mounted Microphone with attached curved tubing. For the staff, the STS-SU1-3W combined microphone and speaker unit has an adjustable neck and features a three way mute switch. The kit comes with an IL-AE99 under the counter hearing loop aerial.

Includes

- STS-A31H Window Intercom Amplifier
- STS-S60 Surface Mounted Speaker
- STS-M14 BENT-G Customer Window Mounted Microphone with Curved Tubing
- STS-SU1-3W Staff Unit
- PS-55 Power Supply
- IL-AE99 Under the Counter Hearing Loop Aerial

Applications

For use where one to one communication is impaired by glass, such as:

- Banks
- Post Offices
- Theaters
- Information Centers
- Public Transit Systems
- Ticket Counters
- Embassies
- Government Buildings

Physical Data

Dimensions (boxed)	Height –6.30″ Width – 12.20″ Depth – 11.81″
Weight (boxed)	5.51lbs
Construction	Mild Steel
	ABS Plastic
Finish	Grey Leatherette
	Black Textured

Ambient Noise Suitability

High



STS-K060

Stainless Bridge Bar Kit

The STS-K060 Window Intercom System features the customer STS-S90-SS Stainless Bridge Bar Unit with a glass-mounted microphone and speaker pods. The STS-SU1-3W-SS combined microphone and speaker unit for the staff is provided in a stainless steel finish to give the kit a sleek modern look. The kit comes with an IL-AE99 under the counter hearing loop aerial.

Includes

- STS-A31H Window Intercom Amplifier
- STS-B90-SS Slimline Bridge Bar Unit
- STS-SU1-3W-SS Staff Unit
- PS-55 Power Supply
- IL-AE99 Under the Counter Hearing Loop Aerial

Physical Data

Dimensions (boxed)	Height –4.63″ Width – 25.50″ Depth – 18.06″
Weight (boxed)	9.37lbs
Construction	Mild Steel
	ABS Plastic
Finish	Stainless Steel

Applications

For use where one to one communication is impaired by glass, such as:

- Banks
- Post Offices
- Theaters
- Information Centers
- Public Transit Systems
- Ticket Counters
- Embassies
- Government Buildings

Ambient Noise Suitability

High



STS-K064

Overhead Speaker and Window Mounted Microphone System

The STS-K064 Window Intercom System features an overhead speaker and window mounted microphone for the customer side, along with the STS-SU1-3W combined microphone and speaker unit that has an adjustable neck and features a three way mute switch. The kit comes with an IL-AE99 under the counter hearing loop aerial.

Includes

- STS-A31H Window Intercom Amplifier
- STS-M14-300 Window Mounted Microphone
- STS_SU1-3W Staff Unit
- STS-S23 Overhead Speaker
- PS-55 Power Supply
- IL-AE99 Under the Counter Hearing Loop Aerial

Applications

For use where one to one communication is impaired by glass, such as:

- Banks
- Post Offices
- Information Centers
- Airports
- Supermarkets/Checkouts
- Pharmacies

Physical Data

Dimensions (boxed)	Height –5.11″ Width – 14.96″ Depth – 12.59″
Weight	6.0lbs
Construction	Stainless Steel
	Mild Steel
	ABS Plastic
Finish	Grey Leatherette
	RAL 9006 Powder Coated Semi Gloss
	Black Textured

Ambient Noise Suitability

High



STS-K080-IP

IP54 Speaker and Microphone System

The STS-K080-IP Window Intercom System features an IP54 STS-S80-IP overhead speaker and an IP54 rated stem microphone for the customer side. The IP54 rating ensures protection against water, dust, and dirt ingress making it suitable for outdoor applications. For the staff, the STS-SU1-3W combined microphone and speaker unit has an adjustable neck and features a three way mute switch. The kit comes with an IL-AE99 under the counter hearing loop aerial.

Includes

- STS-A31H Window Intercom Amplifier
- STS-M15-300-IP54 Stem Microphone
- STS_SU1-3W-B Staff Unit
- STS-S80-IP54 Overhead Speaker
- PS-55 Power Supply
- IL-AE99 Under the Counter Hearing Loop Aerial

Applications

For use outdoors in venues such as:

- Outdoor access points
- Transport and distribution stations
- Ports and ferry terminals
- Security Doors
- Mass Testing Facilities
- Drive through services (food, banking, retail)

Physical Data

Dimensions (boxed)	Height –4.72″ Width – 25.19″ Depth – 13.38″
Weight	7.4lbs
Construction	Stainless Steel
	Mild Steel
	ABS Plastic
Finish	Matt Black
	Black Powder Coated
	Black Textured

Ambient Noise Suitability

High



STS-SS

Integrated Window Intercom System for Deal Tray Drawers

The STS-SS Window Intercom System is designed for integration into deal drawers, deal trays, frames and similar applications. The kit features an integrateable customer microphone and speaker with mounting plates and a free standing staff speaker and microphone unit with a dual mute switch.

Includes

- STS-A31H Window Intercom Amplifier
- STS_SU1-3W Staff Unit
- STS-S61-B-NG Customer Side Integrated Speaker
- STS-M56-B-NG Customer Side Integrated Microphone
- PS-55 Power Supply

Applications

For use in integrated applications like deal drawers, deal trays and frames where high quality transmisson is required in venues such as:

- Pharmacies
- Prisons
- Medical Dispensaries
- Government Buildings and Embassies

Physical Data

Dimensions (boxed)	Height – 6.25″ Width – 12.13″ Depth – 12.38″
Weight	5.0lbs
Construction	Mixed
	ABS Plastic
Finish	Powder Coated Black or Grey
	Black Textured

Product Codes

Integrated Kit in Black	STS-SS-B
Integrated Kit in Grey	STS-SS-G

IL-AE99

Under the Counter Hearing Loop Aerial

The IL-AE99 Under the Counter Hearing Loop Aerial is flexible and can be moulded under the counter in the configuraion as seen in the image. It can be installed with self adhesive clips, P-clips or hot glue. When connected to the STS-A31H Window Intercom Amplifier, it transmits a magnetic field which enables the telecoil in the user's hearing instrument to receive the signal.

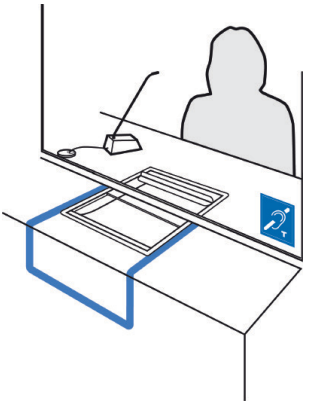



Physical Data

Dimensions	Can be moulded to desired size/ shape Wire length - 72" Wire diameter - 0.15"
Weight	0.22lbs
Construction	Copper Wire with Black Protective Covering
Finish	Black PVC

IL-AE98

Window Mounted Hearing Loop Aerial

The Window Mounted Hearing Loop Aerial comes with a hearing loop sticker, IL-AE96 loop aerial and a back sticker. The front facing sticker with the ear logo has adhesive on the front, and is designed to be installed from the staff side. The IL-AE96 is to be installed between the front and rear sticker to the counter's window.



Physical Data

Dimensions	Height - 8.50" Width - 8.50" Connection Cable Length - 6.5ft
Weight	0.26lbs
Construction	Various
Finish	Various

STS-SJB

Break Out Box

The Break Out Box (BOB) is an accessory that can be used with any Window Intercom System that allows a staff to wear a headset. It can be used in addition to or as a replacement to the staff side speaker and microphone. The BOB is a good solution to environments with high ambient noise and where there are many windows next to each other.

The BOB is available in two models for headsets with 3.5mm connection and RJ11 connections.



STS-SJB-3.5



STS-SJB-RJ11

Features

- Push button mute switch
- Headset connection
- Compact
- Easy to install

Technical Data

Connections	Break Out Box (RJ11 Connection)	
	Headset Loudspeaker(s) and Microphone – B.O.B. Headphones and Microphone	RJ11 Connection
	Break Out Box (3.5mm Connection)	
	Headset Microphone – B.O.B. Microphone	3.5mm TRS Connection
	Headset Loudspeaker(s) – B.O.B. Headphones	3.5mm TRS Connection
	Break Out Box (3.5mm Jack & RJ11 Connection)	
	B.O.B. Microphone (Grey Sleeve) – STS-A31	2 pin Euro-block Connector
	B.O.B. loudspeaker (Black Sleeve) – STS-A31	2 pin Euro-block Connector
	Staff Unit – B.O.B. MIC	2 pin Euro-block Connector
	Staff Unit – B.O.B. SPKR	2 pin Euro-block Connector

Physical Data

Dimensions	Height – 0.80″ Width – 3.80″ Depth – 1.58″
Weight	0.23lbs
Construction	ABS Plastic
Finish	Black

Product Codes

Break Out Box (3.5mm)	STS-SJB-3.5
Break Out Box (RJ11 Connection)	STS-SJB-RJ11

HEADSET-1-RJ11 / HEADSET-1-3.5mm

1 Ear Headset and Microphone

This one ear monoaural headset has a built-in noise cancelling boom microphone. It is compatible with our Break Out Box [STS-SJB].



Technical Data (Microphone)

Pattern	Electret
Impedance	Max. 3.9KΩ
Sensitivity	-43 ± 3dB @ 1KHz
Frequency Range	100-10kHz

Technical Data (Speaker)

Pattern	Dynamic moving coil
Impedance	150Ω / 300Ω
Sound Pressure	94±3dB / 91±3dB at 1kHz
Sound Intensity	80mW / 40mW
Frequency Range	300-3.4 kHz

Physical Data

Weight	0.10lbs

HEADSET-2-RJ11 / HEADSET-2-3.5mm

2 Ear Headset and Microphone

This two ear binaural headset has a built-in noise cancelling boom microphone. It is compatible with our Break Out Box [STS-SJB].



Technical Data (Microphone)

Pattern	Electret
Impedance	Max. 3.9KΩ
Sensitivity	-43 ± 3dB @ 1KHz
Frequency Range	100-10kHz

Technical Data (Speaker)

Pattern	Dynamic moving coil
Impedance	150Ω / 300Ω
Sound Pressure	94±3dB / 91±3dB at 1kHz
Sound Intensity	80mW / 40mW
Frequency Range	300-3.4 kHz

Physical Data

Weight	0.14 lbs

HEADSET-1-DECT

Wireless 1 Ear Headset and Microphone

This mono headset with docking station can be used with the STS-SJB-RJ11 Break Out Box to allow staff hands free communication with any of our Window Intercom Systems.



Technical Data (Microphone)

TX Power	20dBm(100mW)
Sensitivity	-44 ± 3dB @ 1KHz
Frequency Range	10Hz~10kHz

Technical Data (Speaker)

Impedance	20ø speaker element; 32Ω
Frequency Range	300Hz~7000Hz @1kHz

HEADSET-2-DECT

Wireless 2 Ear Headset and Microphone

This mono headset with docking station can be used with the STS-SJB-RJ11 Break Out Box to allow staff hands free communication with any of our Window Intercom Systems.



Technical Data (Microphone)

TX Power	20dBm (100mW)
Sensitivity	-51 ± 3dB @ 1KHz
Frequency Range	10Hz-10kHz

Technical Data (Speaker)

Impedance	20ø speaker element; 32Ω
Frequency Range	300Hz~7000Hz @1kHz



Complete Hearing Solutions
111 2nd Ave NE, Suite 360
St. Petersburg, FL 33701

Contact Us:
Phone: (727) 260-3488
Email: jim@completehearingsolutions.org
Web: https://completehearingsolutions.org